

BASE END VIEW


CLEVIS



PIN EYE




SINGLE TANG



SWECO The first name in dependability

CUSTOM WELDED CYLINDER APPLICATION BUILDSHEET

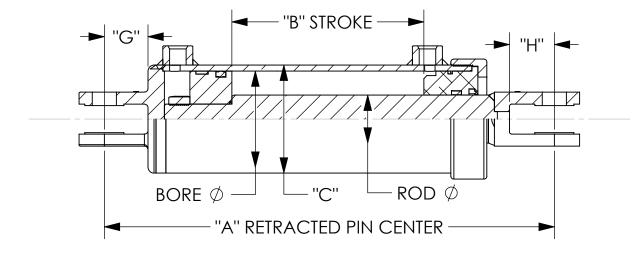

CYLINDER APPLICATION / MACHINE	
SINGLE OR DOUBLE ACTING	BORE DIAMETER
ROD DIAMETER	_ SYSTEM PRESSURE(3000 PSI MAX)
"A" RETRACTED LENGTH	"B" STROKE "C" BARREL O.D

"G" BASE PIN CENTER______ "H" ROD PIN CENTER______

EXTEND PORT SIZE & TYPE _____ RETRACT PORT SIZE & TYPE_____

"E" BASE PIN DIAMETER______ "F" ROD PIN DIAMETER_____ PIN LENGTH_____

PORT LOCATION (IN LINE, 90 TO PIN OR OTHER)


CYLINDER QUOTE QUANTITY_____ COMPANY NAME_____

YOUR NAME_____PHONE___


EMAIL____

ROD END VIEW

CLEVIS



PIN EYE



SINGLE TANG

